

00/60/90

06-12-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



Patent Application Transmittal

Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the **Patent Application** of:Inventors: Bates, *et al.*

For: **PORTABLE PHONE THAT CHANGES
FUNCTION ACCORDING TO ITS
SELF-DETECTED GEOGRAPHICAL
POSITION**


CERTIFICATE OF MAILING UNDER 37 CFR 1.10

I hereby certify that, on the date shown below, this correspondence is being deposited with the United States Postal Service in an envelope addressed to the Commissioner of Patents and Trademarks, Washington, D C 20231 as "Express Mail Post Office to Addressee" Mailing Label No

EK058954434US

on 06/09/00

Derek P. Martin
Name of person mailing paper



Enclosed are:

- ☒ 9 sheets of drawings. (FORMAL/INFORMAL)
- ☒ Specification, Claims and Abstract
- ☒ Declaration & Power of Attorney for Patent Application
- ☒ Information Disclosure Statement (including copies of cited references)
- ☒ Return Postcards

The filing fee has been calculated as shown below:

(Col. 1)

(Col. 2)

For:	No. Filed	No. Extra
Basic Fee		
Total Claims	33 - 20	13
Independent Claims	8 - 3	5
<input type="checkbox"/> Multiple Dependent Claim Presented		

Other Than Small Entity

Rate	Fee
	\$ 690.00
x \$18.00=	\$ 234.00
x \$78.00=	\$ 390.00
\$270.00	\$ 0.00
Total: \$ 1,314.00	

☒ Please charge Deposit Account No. 09-0465 for IBM Corporation charge Deposit Account No. 09-0465 in the amount of \$1,314.00. A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 09-0465 for IBM Corporation.

☒ Any additional filing fees required under 37 C.F.R. §1.16.

☒ Any patent application processing fees under 37 C.F.R. §1.17.

MARTIN & ASSOCIATES, L.L.C.
P.O. Box 548
Carthage, MO 64836-0548
(417) 358-4700

Respectfully submitted,

By *Derek P. Martin*
Derek P. Martin
Registration No.: 36,595
Tel: (417) 358-4700

**PORTABLE PHONE THAT CHANGES FUNCTION ACCORDING TO ITS
SELF-DETECTED GEOGRAPHICAL POSITION**

BACKGROUND OF THE INVENTION

1. Technical Field

5 This invention generally relates to telephone systems and more specifically relates to portable phones.

2. Background Art

 Since Alexander Graham Bell uttered those famous words “Mr. Watson - come here - I want to see you”, the telephone has evolved into a necessity of modern living.

10 Land-based telephone systems are the most ubiquitous, and have been found in most homes and businesses in the United States for many decades. Recently, wireless phones have gained in popularity. Wireless phones include cellular phones, digital phones, satellite phones, etc. For the purpose of discussion herein, the term “portable phone” applies to any and all types of wireless phones, whether now known or developed in the

15 future.

 It would be useful for a user to define different “regions” and to have their phone function differently according to which region the phone is in. For example, it would be useful to have the phone ring with one tone when the user is home, and with a different tone when the user is at work. However, modern portable phones do not have any way of

20 changing function based on the geographical position of the phone. Without a way for a

portable phone to change its function based on its geographical position, portable phones will have limitations that will continue to annoy users.

DISCLOSURE OF INVENTION

According to the preferred embodiments, a portable phone is equipped with a position detector that detects the geographical position of the portable phone, and the function of the phone can be changed according to its geographical position. One or more “regions” may be defined by the user of the portable phone, and the ring parameters for each region may be set independently of the other regions. In this manner a phone in accordance with the preferred embodiments may ring with one tone at home, ring with a different tone at work, ring with a louder volume when on a job site, not ring at all when in church, and ring with a vibration when at the theater. In addition, the preferred embodiments include a dialer that allows selecting a contact from a text list, and that dials a number that depends on the geographical position of the portable phone, or that dials a number and sends with the call the geographical position of the portable phone. The preferred embodiments further allow assigning a telephone number to a defined geographical region, and ringing the portable phone only when within the geographical region that corresponds to the phone number.

The foregoing and other features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF DRAWINGS

The preferred embodiments of the present invention will hereinafter be described in conjunction with the appended drawings, where like designations denote like elements, and:

5 FIG. 1 is a diagram of a portable phone in accordance with the preferred embodiments;

 FIG. 2 is a block diagram of components in the portable phone of FIG. 1;

 FIG. 3 is a diagram showing different regions that may be defined for the portable phone of FIGS. 1 and 2;

10 FIG. 4 is a flow diagram showing the steps in setting up ring parameters for defined geographical regions;

 FIG. 5 is a diagram showing how a region may be dynamically defined in accordance with the preferred embodiments;

15 FIG. 6 is a flow diagram that shows one specific implementation of method 400 of FIG. 4 for dynamically defining a region and its corresponding ring parameters;

 FIG. 7 is a flow diagram of a method in accordance with the preferred embodiments for processing a ring event according to the detected position of the portable phone;

20 FIG. 8 is a flow diagram of one suitable implementation of step 760 of FIG. 7 in accordance with the preferred embodiments;

 FIG. 9 is a table showing sample regions and corresponding ring parameters for illustrating the concepts of the preferred embodiments;

25 FIG. 10 is a flow diagram showing the steps in defining one or more phone numbers for a telephone contact, where a telephone number may be defined for each defined region for the telephone contact;

FIG. 11 is a flow diagram of a first method for dialing a telephone contact when its corresponding text is selected;

FIG. 12 is a flow diagram of a second method for dialing a telephone contact when its corresponding text is selected; and

5 FIG. 13 is a flow diagram of a method for assigning a phone number to a geographical region and assigning one or more phones to the assigned phone number, and for ringing an assigned phone only when the assigned phone is within the defined geographical region.

BEST MODE FOR CARRYING OUT THE INVENTION

10 Throughout history, the telephone has been an important device for communicating the need for emergency services. The phrase "Operator, get me the police!" has been used in many Hollywood movies. Land-based telephone systems have evolved to include emergency systems known as "911" systems that catalog the location of each telephone along with its telephone number. Modern land-based telephone
15 systems communicate an identifier when placing a call, often referred to as a "caller ID". When a person calls 911 from a land-based phone, the 911 computer system automatically detects the caller ID, and displays the caller's location from its database. This allows emergency vehicles to be dispatched even if the caller is unable to speak or identify his or her location.

20 Retrieving the location of a land-based phone when a person calls 911 is a simple task because the location of the phone does not change over time. However, with portable phones, there is currently no "911" equivalent system that allows emergency vehicles to be dispatched to the portable phone's location, because the location constantly changes. In one case in South Dakota, a woman ran her car into a ditch during a blizzard.

She called the police on her cellular phone and said she had no idea where she was located. Over the next several hours, she called in several times for a few minutes at a time (to preserve her phone's battery life) while emergency services personnel worked with the cell phone company to locate the woman's phone based on a well-known technique known as "triangulation" of her cell phone signal. After several hours, her location was identified with enough certainty to allow emergency workers to find her. While this outcome was a happy one, it is clear that many people who have emergencies do not have hours to wait for help to arrive. This case illustrates the need for a 911-type of system for portable phones. If a person is having a heart attack, that person may well be dead in a few minutes if medical help is not received immediately. For this reason the Federal Communications Commission has mandated that portable phone providers implement an Enhanced 911 (E911) system by the end of the year 2001.

One way to implement an enhanced 911 system for portable phones is to place a position detector in each phone that communicates the position of the phone to the portable phone service provider. One popular type of position detector is a Global Positioning System (GPS) detector that detects its geographical position based on signals received from several satellites. A press release dated 08/10/98 at www.sirf.com/as_pr13.htm states that Nokia, one of the leading manufacturers of portable phones, invested in the GPS technology of SiRF Technology, Inc. to allow putting SiRF's GPS detectors into Nokia phones in order to meet the FCC mandate for an E911 system.

While the prior art suggests placing a GPS detector in a portable phone, this teaching is for the purpose of implementing an E911 system, as described above. An E911 system can be implemented by communicating the location of the phone to the cell phone provider without changing the apparent function of the portable phone to the user.

The preferred embodiments described herein use the position information from an on-board position detector (*e.g.*, GPS detector) to change the function of the portable phone according to one or more geographical regions defined by the user. In this manner a portable phone may automatically change its function without intervention by a user as the position of the portable phone changes from one defined region to another.

Referring now to FIG. 1, a portable phone 100 in accordance with the preferred embodiments includes a case 105. Within or attached to case 105 are antenna 110, keypad 120, display 130, speaker 140, and microphone 150. Antenna 110 is a standard antenna as is known in the art for allowing portable phone 100 to communicate with its service provider in placing and receiving calls. Keypad 120 includes the traditional numerals, star, and pound key found on most telephone keypads. In addition, keypad 120 includes a "Send" key for placing a call, an "End" key for terminating a call, a "Clear" key for clearing a portion of the display 130, a "Menu" key for displaying a menu on the display 130, up arrow and down arrow keys for scrolling through menus and lists on the display 130, a "Mem" key (short for "memory") that displays information stored in phone 100, and an "ABC" key that changes the ten numeral keys from numeric input to alpha character input. It is well known in the art that the 2 through 0 numeral keys on standard telephones include most of the alphabet characters. For the sake of clarity in the drawing, the alpha characters associated with numeral keys 2 through 0 are not shown. By pressing the "ABC" key, the phone enters and alpha input mode that allows inputting text information into phone 100 via keypad 120 that can be displayed on display 130. The keys on keypad 120 in FIG. 1 are shown by way of example, and many different keys not explicitly shown may be substituted or added within the scope of the preferred embodiments.

Display 130 is preferably a backlit liquid crystal display (LCD) that includes multiple lines of alphanumeric display capability. Speaker 140 is a small, low-power speaker as is known in the art for portable phones. In addition, microphone 150 is a small, low-power microphone as is known in the art for portable phones.

5 The components of FIG. 1, except for case 105, are shown in the block diagram of FIG. 2. The keypad 120 and microphone 150 are input devices, the display 130 and speaker 140 are output devices, and antenna 110 is both an input and an output device. Portable phone 100 includes a processor 210 that is coupled to the antenna 110, keypad 120, display 130, speaker 140, and microphone 150. In addition, processor 210 is also
10 coupled to a position detector 220 and to a memory 230. Position detector 220 is an electronic device that provides its geographical position to processor 210, preferably in longitude and latitude coordinates. In the preferred embodiments, position detector 220 is a global positioning system (GPS) detector. Memory 230 may include any combination of volatile and non-volatile memory, and preferably includes one or more defined
15 geographical regions 240. Processor 210 includes a dial mechanism 250 that dials telephone numbers that a user enters into display 130 via keypad 120, and that dials telephone numbers corresponding to telephone contacts stored in memory 230. Processor 210 takes input from keypad 120, microphone 150, position detector 220, antenna 110, and memory 230, and generates appropriate output on display 130, speaker 140, antenna
20 110, and memory 230. Note that the block diagram of FIG. 2 does not include many components or features known in prior art portable phones. FIG. 2 is a simple diagram showing only the most commonly-known components and features that allow a complete description of the preferred embodiments of the present invention. Of course, portable phone 100 could also include any component or feature that is known in the art in
25 addition to those shown within the scope of the preferred embodiments.

FIG. 3 illustrates different geographical regions that a user may want to define in order to program portable phone 100 to function differently according to whether or not it is in a defined region. For example, we assume that an architect is the user of a portable phone in accordance with the preferred embodiments, and wants to program her phone for the five different regions shown in FIG. 3: home, church, office, job site, and theater. These regions are shown by way of example, and the preferred embodiments expressly extend to the definition of any suitable geographical region.

Referring to FIG. 4, a method 400 shows the steps in defining regions and setting ring parameters for each region. First, a geographical region is defined (step 410). Next, ring parameters are set for this newly-defined region (step 420). Method 400 is repeated for each region that needs to be defined, thus creating ring parameters for each region that are independent of the ring parameters of other regions. Once the desired geographical regions and the corresponding ring parameters are defined, the portable phone 100 will function differently according to its detected geographical position.

Step 410 in FIG. 4 allows the user to define a geographical region of interest. There are numerous ways for the user to define a geographical region. As stated above, the preferred implementation of position detector 220 in FIG. 2 is a GPS detector. If position detector 220 is a GPS detector, the geographical region must be defined in GPS coordinates. With the proliferation of GPS detectors, it may well be that a user may be able to consult a database to retrieve GPS coordinates for a given location. For example, a mapping company may provide a web site that provides GPS coordinates for any selected region on a map. A user could then enter these coordinates into portable phone 100 using keypad 120 and display 130 to define a region. In the alternative, a company may offer a service that allows a user to call the company using the portable phone 100, which then communicates to the service an identifier for the region of interest (such as an

address), and the service could then download GPS coordinates for the region of interest into portable phone 100. Another way for a user to define a geographical region in step 410 of FIG. 4 takes advantage of the on-board position detector 220 within portable phone 200 to allow a user to dynamically define a region of interest. The dynamic
5 creation of a geographical region of interest is explained below with reference to FIG. 5. The preferred embodiments expressly extend to all mechanisms and methods for defining a geographical region, whether currently known or developed in the future.

We assume for the sake of illustration that the architect's office in FIG. 3 is located within an L-shaped office building, the outline of which is shown as 510 in FIG.
10 5. The architect can dynamically define the geographical region corresponding to her office building by placing the portable phone in a menu-driven "region definition" mode that prompts the user to perform certain actions to define a region. When the "region definition" mode is entered, the display 130 prompts the user to travel to the location of a corner (*i.e.*, boundary point) of the region and press a key (such as the # key). In the
15 example of FIG. 5, we assume that the user puts her portable phone 100 into "region definition" mode, then walks to point A that corresponds to a corner of building 510. The user then presses the # key, which causes processor 210 to read the current geographical position of the portable phone from the position detector 220 and store this coordinate in memory 230. The user then travels to point B, and presses the # key again, causing the
20 processor 210 to get a new position from position detector 220 and store the coordinate in memory 230. The user then travels to points C, D, E and F, pausing each time to press the # key to store the current position as a boundary point of the region. After pressing the # key at point F, the user then presses another key (such as the "End" key) to instruct the processor 210 to compute a region based on the entered corner points. Processor 210
25 takes each boundary point and effectively "connects the dots" to generate a region of interest. By allowing a user to dynamically define regions of interest using the position

detector 220 within the portable phone 100, the user does not need to access any position information in any database when defining regions of interest.

Note that a GPS detector reading is only accurate to within a specified tolerance. For this reason, after constructing the region 510 in FIG. 5, the region may be enlarged by the amount of the tolerance, as shown as 520 in FIG. 5. Expanding the region by the amount of allowable tolerance assures that any reading taken within the building will be detected as lying within the defined region.

Referring now to FIG. 6, a method 600 illustrates one specific implementation of method 400 of FIG. 4 that allows a user to dynamically define a region of interest as explained above with reference to FIG. 5. First, the phone display prompts for boundary points of the region (step 610). The user then goes a boundary point (step 620) and presses a key on the phone to store the boundary point (step 630). The phone then stores the current position read from the position detector 220 as a boundary point (step 640). If there are more boundary points to define (step 650=YES), steps 610-640 are repeated until all boundary points have been entered (step 650=NO). At this point a different key is pressed on the phone to compute the region from the stored boundary points (step 660). The phone computes the region by connecting the boundary points (step 670). The phone then displays a menu of ring parameters to the user (step 680). The user selects the ring parameters for the newly-defined region using the menu and keypad 120. Note that for this particular implementation, steps 610-670 correspond to step 410 in FIG. 4, and steps 680-690 corresponds to step 420 in FIG. 4. Method 600 thus allows a user to dynamically define a region, then set the corresponding ring parameters for that region.

Referring now to FIG. 7, a method 700 shows the steps in processing a ring event in accordance with the preferred embodiments. We assume that a ring event is a

FIG. 8 illustrates one suitable implementation for step 760 of FIG. 7 that rings the portable phone according to the corresponding ring parameters for the region. We assume for this example that the ring parameters may specify two types of rings, an audible ring and a vibration ring. If the ring parameters for the current region specify an audible ring (step 810=YES), the processor rings the phone using an audible ring that corresponds to the ring parameters for the current region (step 840). If the ring parameters for the current region do not specify an audible ring (step 810=NO), and if they do not specify a vibration ring (step 820=NO), the ring is ignored, and the portable phone does not answer the call that was initiated by the ring signal received in step 710 of FIG. 7. If the ring parameters do not specify an audible ring (step 810=NO) but specify a vibration ring (step 820=YES), the phone is ringed using a vibration ring (step 830). Note that the term “vibration ring” is used herein to refer to a ring mode that simply vibrates the phone rather than providing an audible ring so the user can be discretely notified of a call without disrupting others. Pagers that have both audible and vibration modes are well-known in the art. Note that other ways of “ringing” a phone are also

possible, such as flashing the light on the phone. The preferred embodiments extend to any way for notifying a user of an incoming call on a portable phone, whether now known or developed in the future.

FIG. 9 shows a table of regions and corresponding ring parameters for the five regions in FIG. 3. We assume that the architect wants her portable phone to ring with an audible ring, with a preset tone (tone A), with a normal ring volume when at home. When at the office, the phone should ring with an audible ring with a different tone (tone B) with a normal ring volume. When at church, the phone should not ring at all. When at the job site where a building is being constructed, the phone should ring with an audible ring with the same tone as the office ring, but with a high volume so the ring will be more likely to be heard over the noise of the construction site. When at the architect's favorite theater, the phone should ring in vibration mode to not disturb the theatrical performance. FIG. 9 illustrates the flexibility provided by the present invention by allowing a user to define geographical regions and to vary the function of a portable phone automatically based on its geographical position.

Having a position detector 220 within a portable phone 100 also allows other features to be incorporated into portable phone 100 that can benefit from the position information provided by position detector 220. One example is to dial different telephone numbers depending on the geographical position of the phone. For example, let's assume that a college student wants to program an entry for "Domino's Pizza" into his portable phone. He can enter the text Domino's Pizza into a text field corresponding to a telephone contact, and then define a first region (that includes his dorm room) that is correlated to a first telephone number for a Domino's Pizza that is closest to his dorm room, and then define a second region (that includes his girlfriend's apartment) that is correlated to a second telephone number for a different Domino's Pizza that is closest to

his girlfriend's apartment. Now when he selects the text "Domino's Pizza" from his list of telephone contacts, the portable phone will call different numbers depending on the geographical position of the phone. If the phone is within the first region that includes his dorm room, the phone will dial the first telephone number. If the phone is within the
5 second region that includes his girlfriend's apartment, the phone will dial the second telephone number. Dialing different telephone numbers based on the geographical position of the phone is expressly within the scope of the preferred embodiments.

Referring to FIG. 10, a method 1000 allows a user to enter a telephone contact into the memory of the phone, and to store multiple phone numbers that each correspond
10 to a geographical region for the telephone contact. First, the text corresponding to the desired telephone contact is entered into the phone (step 1010). This is preferably done using keypad 120 and display 130. In the example above, step 1010 is when the user keys in the text "Domino's Pizza" in his list of telephone contacts. Next, method 1000 determines whether phone numbers for multiple geographical regions need to be entered
15 (step 1020). If multiple regions are not needed (step 1020=NO), the phone number for this contact is entered (step 1030). If, however, phone numbers for multiple regions need to be entered (step 1020=YES), a default phone number is first entered (step 1040) that will be called when the phone is not within any of the defined regions for this telephone contact. Next, either a pre-existing region is selected, or a new region is defined (step
20 1050). A pre-existing region may be selected from a menu on the display 130, or a new region may be defined using the concepts previously discussed herein. A phone number for the telephone contact in this region is then entered (step 1060). If there are more regions for this telephone contact (step 1070=YES), steps 1050, 1060, and 1070 repeat until there are no more regions to enter for this telephone contact (step 1070=NO). At
25 this point the portable phone has been programmed to dial different phone numbers for the same telephone contact depending on the geographical position of the portable phone.

Referring to FIG. 11, a method 1100 is performed when a user selects a desired contact from the text list of contacts, and presses the "Send" button to initiate a telephone call to that contact (step 1110). If no regions are defined for this contact (step 1120=NO), the single phone number for this contact is dialed (step 1130) by the dial mechanism 250 of FIG. 2. If one or more region is defined for this contact (step 1120=YES), the phone determines its position from its on-board position detector (step 1140). If the phone is within a defined region for this contact (step 1150=YES), the phone number for this region for this contact is dialed (step 1170). If the phone is not within a defined region for this contact (step 1150=NO), the default phone number for this contact is dialed (step 1160). In this manner method 1100 can dial different telephone numbers for the same telephone contact depending on the geographical position of the portable phone.

Having position detector 220 within a portable phone 100 also allows transmitting the location of the phone with a call. Referring to FIG. 12, step 1210 is the same step as step 1110 of FIG. 11, where a telephone contact has been selected from a text list by a user and the "Send" key has been pressed to initiate a call to that contact. Next, the position of the phone is determined from the position detector (step 1220). The phone number for the selected contact is then dialed (step 1230) by the dial mechanism 250, and the position of the portable phone is then sent with the phone call (step 1240). Method 1200 allows a way for the telephone number being called to determine the location of the caller. In the Domino's Pizza example given above, Domino's Pizza may decide to provide one telephone number for many of its restaurants, with the call being routed to the closest restaurant based on the geographical position of the caller that is transmitted with the call in step 1240. Thus, in addition to a "caller ID" that is sent with land-based telephones, method 1200 could also send a "caller location" that identifies where the call is originating. Note that step 1240 in FIG. 12 states "Send Position of Phone with Call", but this step expressly includes any way of sending location information, whether before

the call is connected (similar to "caller ID" for land-based phones) or after the call is connected.

Another useful concept is now possible with portable phones that can detect their position. A telephone number can be assigned to a geographical region, and one or more portable phones can then be assigned to that region. When a call goes out to the telephone number corresponding to the region, any phones assigned to that region will ring. If a phone assigned to that region is not in the region when a call comes in, it does not ring. This concept has many possible uses. For example, each entrance of a large industrial building could have a security guard assigned. Each entrance can then have a telephone number assigned to it. If the Security Supervisor wants to check to make sure each entrance is being properly guarded, he or she may call the number corresponding to each entrance. If the guard is at his or her post, the guard's phone will ring so he or she can report to the supervisor. If, for some reason, the guard is not at his or her post, a voice message could inform the supervisor that there is no assigned phone in the region corresponding to that phone number. Assigning a telephone number to a geographical region, and using the position detector in a portable phone to determine whether to ring or not based on whether the portable phone is in the assigned region or not, is a powerful concept. This concept opens up many new possibilities for monitoring the presence or absence of people.

Referring to FIG. 13, a method 1300 includes the steps for assigning a telephone number to a geographical location, and answering a call based on whether or not there are any assigned phones within that region, as discussed above. First, a phone number is assigned to a defined geographical region (step 1310). Next, one or more portable phones are assigned to the geographical region (step 1320). When the assigned phone number is called (step 1330=YES), method 1300 determines whether there are any assigned phones

turning off their phone when they don't want a call, so long as the region has been defined with ring parameters that include "no ring" or "vibration ring". In addition, the volume and tone of the ring can be adjusted according to the geographical position of the phone. The result is a portable phone that is much more user-friendly, adapting itself to the programmed needs of the user automatically as the phone changes location.

One skilled in the art will appreciate that many variations are possible within the scope of the present invention. Thus, while the invention has been particularly shown and described with reference to preferred embodiments thereof, it will be understood by those skilled in the art that these and other changes in form and details may be made therein without departing from the spirit and scope of the invention.

We claim:

CLAIMS

- 1 1. A portable phone comprising:
2 a position detector that detects geographical position of the portable phone; and
3 a processor coupled to the position detector that determines whether or not to ring
4 the portable phone based on the detected geographical position of the portable phone
5 when a call is received by the portable phone.
- 1 2. The portable phone of claim 1 wherein the position detector comprises a global
2 positioning system (GPS) detector.
- 1 3. The portable phone of claim 1 wherein the processor further determines
2 characteristics of a ring signal based on the detected geographical position of the portable
3 phone when the processor determines to ring the portable phone.
- 1 4. The portable phone of claim 3 wherein the characteristics of the ring signal
2 include volume, type and tone of the ring signal.
- 1 5. The portable phone of claim 4 wherein the type of the ring signal includes an
2 audible ring and a vibration ring.
- 1 6. The portable phone of claim 1 wherein the processor does not ring the portable
2 phone if the portable phone is in a predefined region.
- 1 7. The portable phone of claim 1 wherein the processor rings the portable phone
2 with increased volume if the portable phone is in a predefined region.

1 9. The portable phone of claim 1 further comprising a dial mechanism for selecting
2 stored text that corresponds to a desired telephone contact, such that when a user selects
3 the stored text, the dial mechanism dials a first stored telephone number when the
4 portable phone is in a first defined region and dials a second stored telephone number
5 when the portable phone is in a second defined region.

1 10. The portable phone of claim 1 further comprising a dial mechanism for selecting
2 stored text that corresponds to a desired telephone contact, such that when a user selects
3 the stored text, the dial mechanism dials a first stored telephone number and
4 communicates the detected geographical position of the portable phone with the call to
5 the first stored telephone number.

- 1 11. A portable phone comprising:
2 a position detector that detects geographical position of the portable phone; and
3 a dial mechanism coupled to the position detector for selecting stored text that
4 corresponds to a desired telephone contact, such that when a user selects the stored text,
5 the dial mechanism dials a first stored telephone number when the portable phone is in a
6 first defined region and dials a second stored telephone number when the portable phone
7 is in a second defined region.

006090" FEF6960

1 12. A portable phone comprising:
2 a position detector that detects geographical position of the portable phone; and
3 a dial mechanism coupled to the position detector for selecting stored text that
4 corresponds to a desired telephone contact, such that when a user selects the stored text,
5 the dial mechanism dials a first stored telephone number and communicates the detected
6 geographical position of the portable phone with the call to the first stored telephone
7 number.

005050 "F5E16360

1 13. A telephone system comprising:
 2 a portable phone that includes a position detector that detects geographical
 3 position of the portable phone;
 4 a defined geographical region that is assigned a telephone number;
 5 a processor coupled to the portable phone that determines from the position
 6 detector the geographical position of the portable phone, and that rings the portable phone
 7 when the assigned telephone number of the defined region is called if the portable phone
 8 is within the defined geographical region.

1 14. The telephone system of claim 13 wherein the position detector comprises a
 2 global positioning system (GPS) detector.

1 15. The telephone system of claim 13 wherein the processor does not ring the portable
 2 phone when the assigned telephone number of the defined region is called and the
 3 portable phone is outside the defined geographical region.

1 16. The telephone system of claim 13 wherein the processor delivers a voice message
 2 when the assigned telephone number of the defined region is called and the portable
 3 phone is outside the defined geographical region.

1 17. A method for controlling the operation of a portable phone, the method
 2 comprising the steps of:
 3 (A) providing a position detector with the portable phone that detects geographical
 4 position of the portable phone;
 5 (B) detecting the geographical position of the portable phone using the position
 6 detector;
 7 (C) determining whether or not to ring the portable phone based on the detected
 8 geographical position of the portable phone when a call is received by the portable phone.

1 18. The method of claim 17 wherein the position detector comprises a global
 2 positioning system (GPS) detector.

1 19. The method of claim 17 further comprising the step of determining characteristics
 2 of a ring signal based on the detected geographical position of the portable phone when
 3 step (C) determines to ring the portable phone.

1 20. The method of claim 19 wherein the characteristics of the ring signal include
 2 volume, type and tone of the ring signal.

1 21. The method of claim 20 wherein the type of the ring signal includes an audible
 2 ring and a vibration ring.

1 22. The method of claim 17 wherein step (C) does not ring the portable phone if the
 2 portable phone is in a predefined geographical region.

1 23. The method of claim 17 wherein step (C) rings the portable phone with increased
 2 volume if the portable phone is in a predefined geographical region.

- 1 28. A method for making a call on a portable phone, the method comprising the steps
- 2 of:
- 3 providing a position detector with the portable phone that detects geographical
- 4 position of the portable phone;
- 5 detecting the geographical position of the portable phone using the position
- 6 detector;
- 7 selecting stored text that corresponds to a desired telephone contact;
- 8 dialing a first stored telephone number corresponding to the desired telephone
- 9 contact when the portable phone is in a first defined region; and
- 10 dialing a second stored telephone number corresponding to the desired telephone
- 11 contact when the portable phone is in a second defined region.

1 29. A method for making a call on a portable phone, the method comprising the steps
2 of:
3 providing a position detector with the portable phone that detects geographical
4 position of the portable phone;
5 detecting the geographical position of the portable phone using the position
6 detector;
7 selecting stored text that corresponds to a desired telephone contact;
8 dialing a first stored telephone number that corresponds to the desired telephone
9 contact; and
10 communicating the detected geographical position of the portable phone with the
11 call to the first stored telephone number.

1 30. A method for making a call on a portable phone, the method comprising the steps
2 of:

3 providing a position detector with the portable phone that detects geographical
4 position of the portable phone;

5 detecting the geographical position of the portable phone using the position
6 detector;

7 assigning a telephone number to a defined geographical region;

8 ringing the portable phone when the assigned telephone number of the defined
9 region is called if the portable phone is within the defined geographical region.

1 31. The telephone system of claim 30 wherein the position detector comprises a
2 global positioning system (GPS) detector.

1 32. The telephone system of claim 30 further comprising the step of not ringing the
2 portable phone when the assigned telephone number of the defined region is called and
3 the portable phone is outside the defined geographical region.

1 33. The telephone system of claim 30 further comprising the step of delivering a voice
2 message when the assigned telephone number of the defined region is called and the
3 portable phone is outside the defined geographical region.

**PORTABLE PHONE THAT CHANGES FUNCTION ACCORDING TO ITS
SELF-DETECTED GEOGRAPHICAL POSITION**

ABSTRACT OF THE DISCLOSURE

A portable phone is equipped with a position detector that detects the
5 geographical position of the portable phone, and the function of the phone can be changed
according to its geographical position. One or more "regions" may be defined by the user
of the portable phone, and the ring parameters for each region may be set independently
of the other regions. In this manner a phone in accordance with the preferred
embodiments may ring with one tone at home, ring with a different tone at work, ring
10 with a louder volume when on a job site, not ring at all when in church, and ring with a
vibration when at the theater. In addition, the preferred embodiments include a dialer that
allows selecting a contact from a text list, and that dials a number that depends on the
geographical position of the portable phone, or that dials a number and sends with the call
the geographical position of the portable phone. The preferred embodiments further
15 allow assigning a telephone number to a defined geographical region, and ringing the
portable phone only when within the geographical region that corresponds to the phone
number.



FIG. 1



FIG. 2

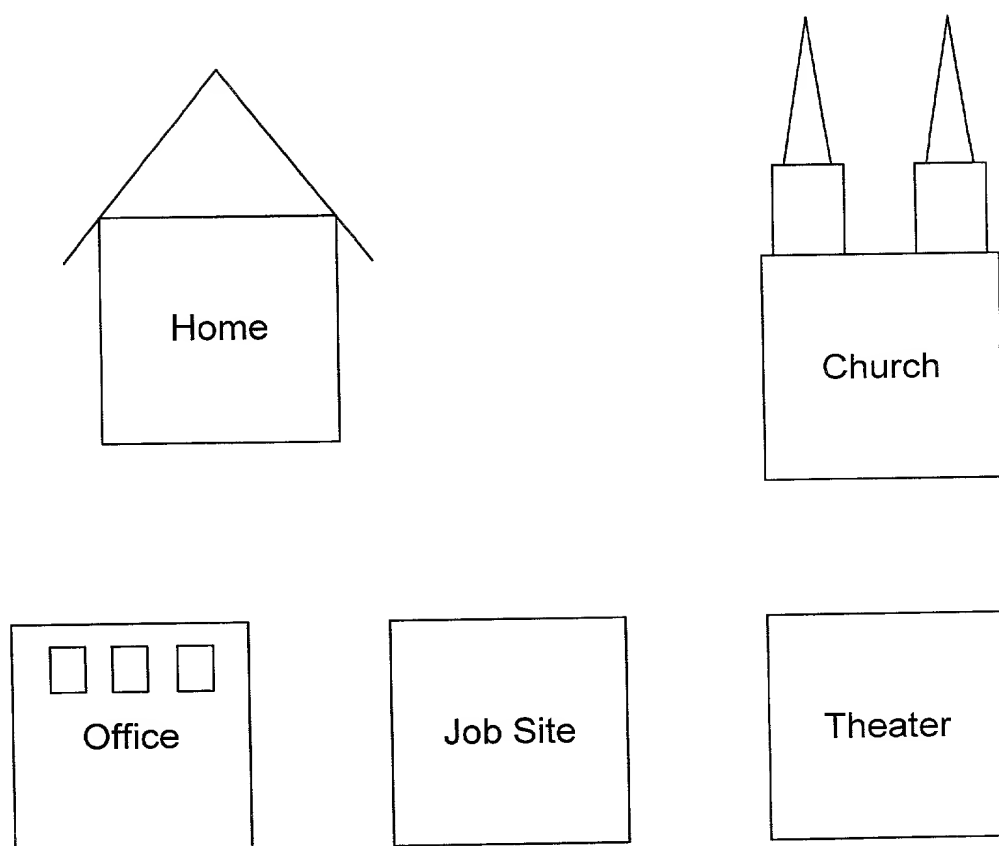


FIG. 3

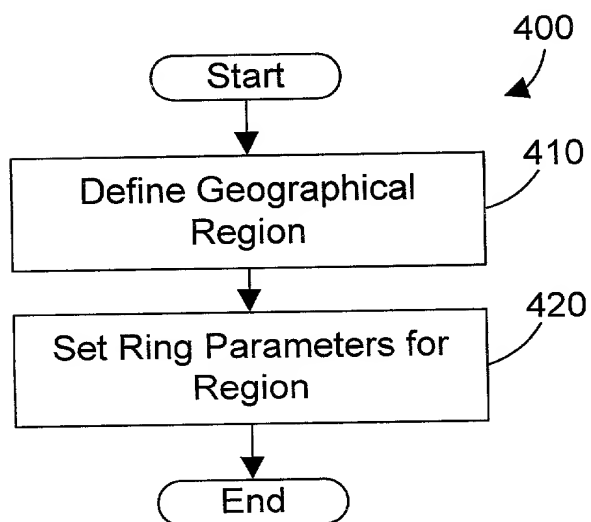


FIG. 4

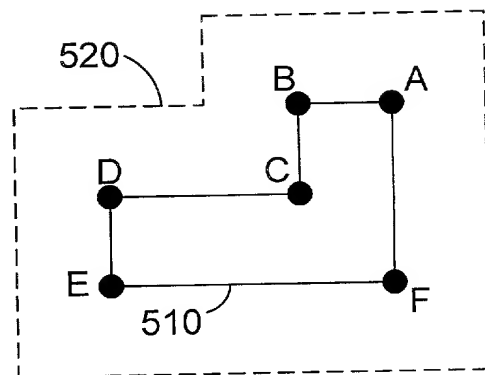


FIG. 5



FIG. 6

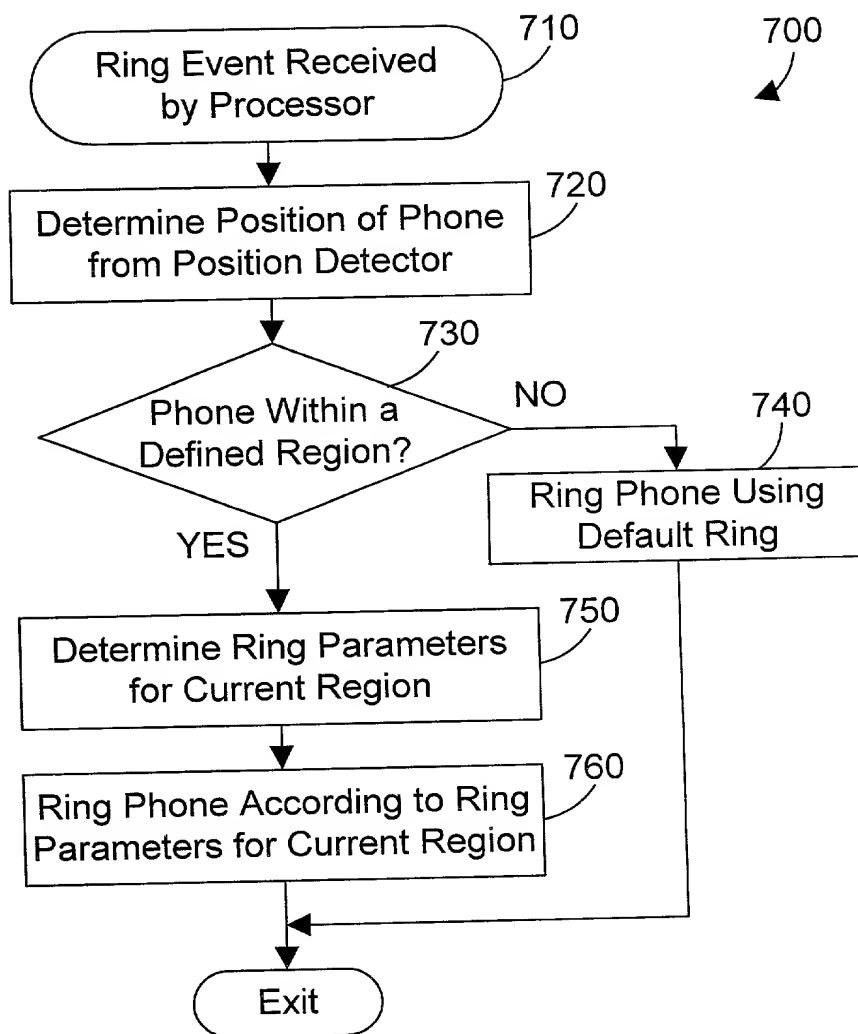


FIG. 7

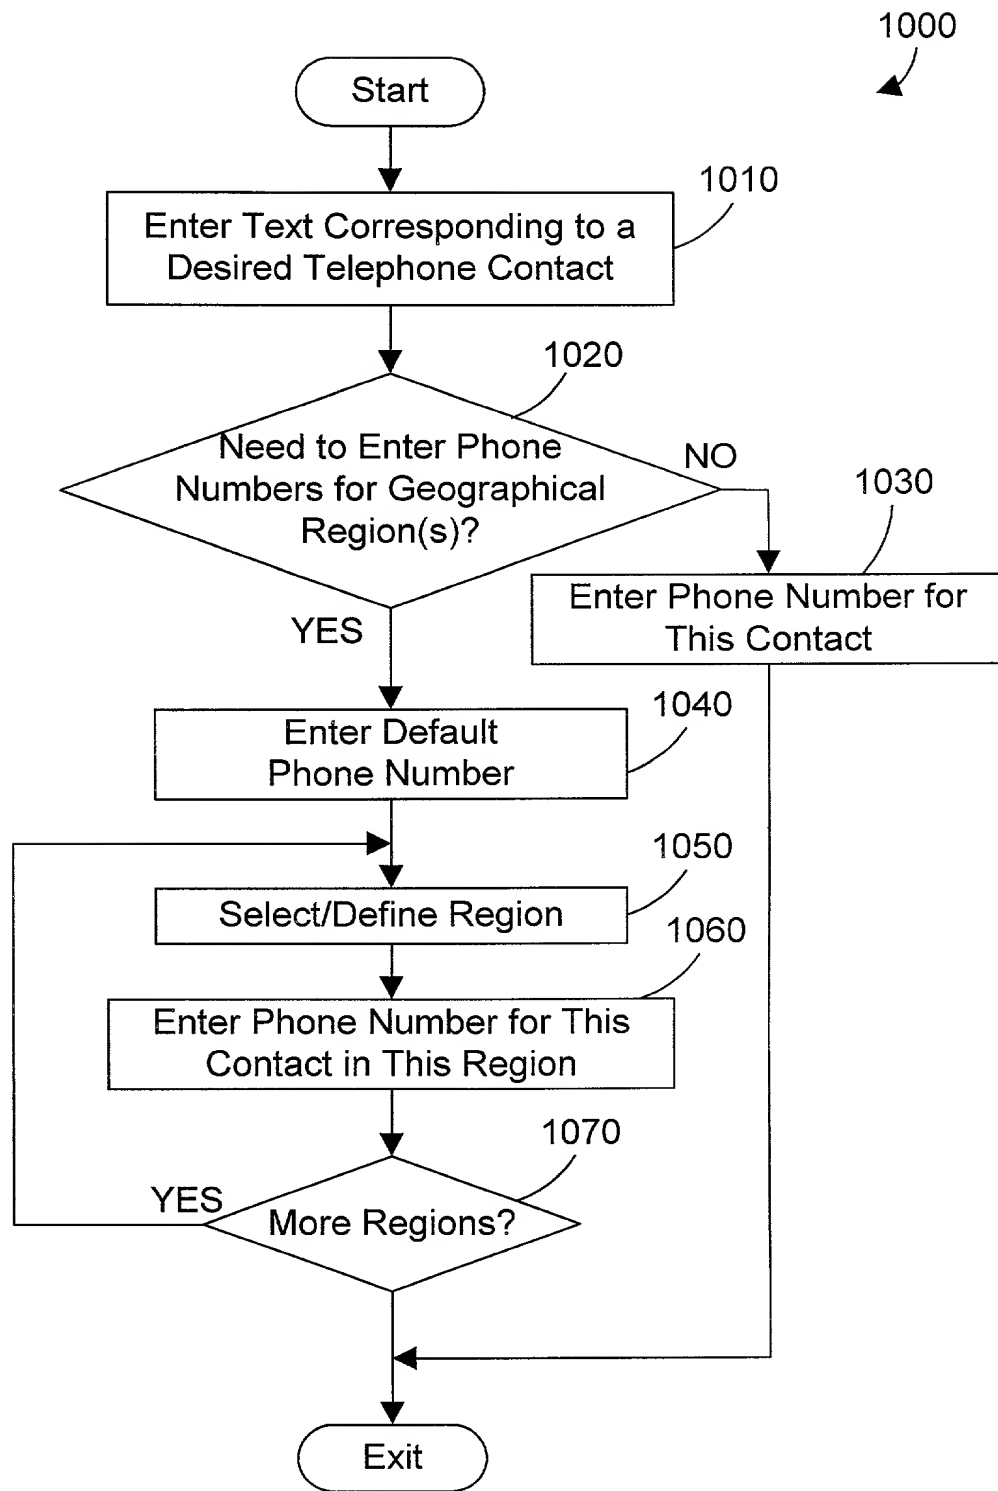


FIG. 10

1100

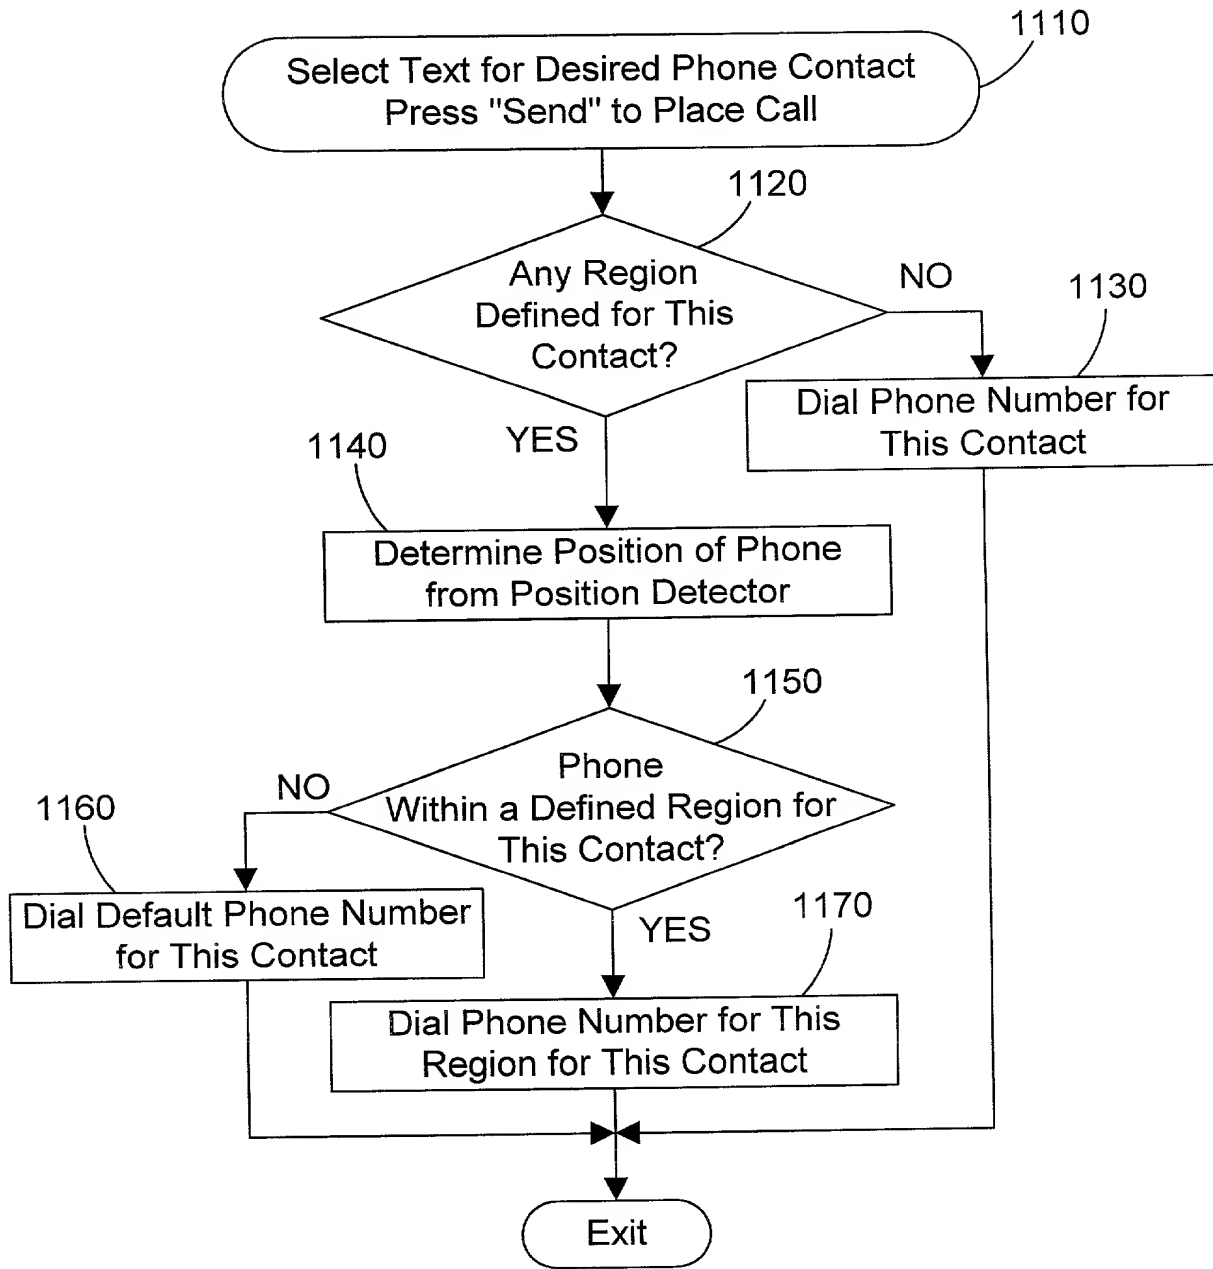


FIG. 11

006090 "TEL6560

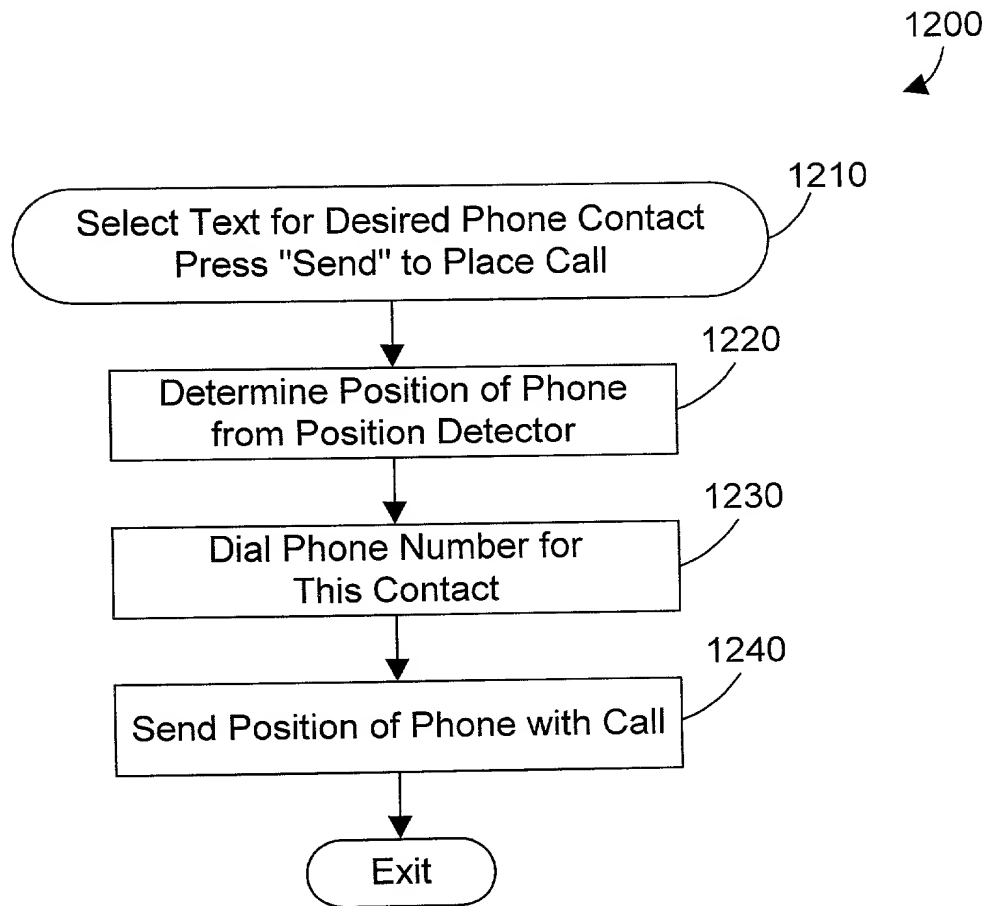


FIG. 13

As below named inventors, I hereby declare that:

☐ was filed on _____ as United States Application Serial No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I acknowledge the duty to disclose information which is material to the patentability as defined in 37 CFR §1.56.

Prior Foreign Application(s):			
Number	Country	Day/Month/Year	Priority Claimed
			Yes <input type="checkbox"/> No <input type="checkbox"/>

Application Number	Filing Date
--------------------	-------------

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to patentability of this application as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. Applications:

Serial No.	Filing Date	Status (patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

William J. McGinnis, Jr. Reg. No. 25,698	Roy W. Truelson Reg. No. 34,265	Steven W. Roth Reg. No. 34,712	James R. Nock Reg. No. 42,937
John E. Hoel Reg. No. 26,279	Christopher A. Hughes Reg. No. 26,914	Edward A. Pennington Reg. No. 32,588	Joseph C. Redmond, Jr. Reg. No. 18,753
Derek P. Martin Reg. No. 36,595			

Address all telephone calls to: Mr. Derek P. Martin
(417) 358-4700

Address all correspondence to: Mr. Derek P. Martin



24038

PATENT TRADEMARK OFFICE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1) Full name of the first inventor: Cary Lee Bates

Signature: Cary Lee Bates Date 6-8-00

Residence: 450 73rd Street N.W.
Rochester, Minnesota 55901

Citizenship: USA

Post Office Address: Same as Residence

- (2) Full name of the second inventor: Jeffrey Michael Ryan

Signature: _____ Date _____

Residence: 6 Second Street N.W.
P.O. Box 550
Byron, Minnesota 55920

Citizenship: USA

Post Office Address: Same as Residence

- (3) Full name of the third inventor: John Matthew Santosuosso

Signature: John Matthew Santosuosso Date 6-8-2003

Residence: 1402 30th Street N.W.
Rochester, Minnesota 55901

Citizenship: USA

Post Office Address: Same as Residence

005090"TEET6560